


# AQUAJET 5800 SERIES PUMP

Model: 5853-GE12-V81D

## IDENTIFYING THE PART NUMBER:

5853-GE12-V81D

|                                       |
|---------------------------------------|
| BASEPLATE AS SHOWN                    |
| 115VAC MOTOR                          |
| EMI/RFI NOISE SUPPRESSION             |
| BEVERAGE AND DRINKING WATER DELIVERY  |
| NSF OR FDA LISTED MATERIALS           |
| PRESSURE REGULATED AT 60 PSI          |
| PRESSURE SENSING MOTOR CONTROLLER     |
| 3.5 DEGREE CAM                        |
| PUSH-TO-CONNECT PORTS FOR 3/8" TUBING |
| SERIES 5800 PUMP                      |

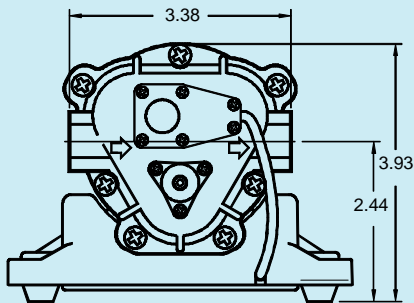

## SPECIFICATIONS:

### ■ MOTOR:

TYPE:

115 VAC, Permanent Magnet,  
Totally Enclosed, Non-Ventilated

LEADS:

18 AWG, 6' Long Power Cord

TEMP. LIMITS:

For User Safety, Optimal Performance, and  
Maximum Motor Life, This Motor is Equipped with a  
Thermal Protector that Limits the Motor Shell  
Temperature to 145°F (63°C), as Shown on the Heat  
Rise Graph.

DUTY CYCLE:

See Heat Rise Graph

### ■ PRESSURE CONTROLLER:

Factory Set to Approximately 60 PSI.

### ■ PUMP DESIGN:

3 Chamber Diaphragm Pump, Self Priming,  
Capable of Being Run Dry

### ■ TYPICAL APPLICATION:

Beverage and Drinking Water Delivery

### ■ MATERIALS:

PUMP HOUSINGS:

Polypropylene

VALVES:

EPDM

DIAPHRAGM:

Santoprene

FASTENERS:

Stainless Steel

CONTROLLER HOUSING:

Aluminum

### ■ LIQUID TEMPERATURE:


140°F (60°C) Max.

### ■ PUMP CERTIFICATIONS:

NSF Standard 58

### ■ PRIMING CAPABILITIES:

9 Feet

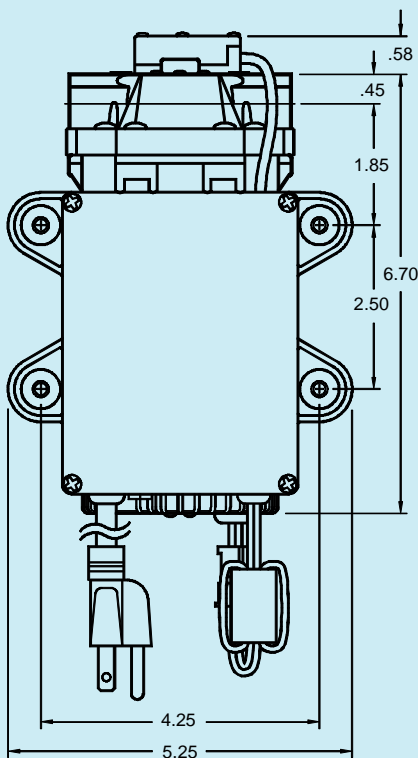

WEIGHT: 6 lbs.




Aquatec International, Inc.  
17422 Pullman, Irvine, CA 92614  
Sales: 949-225-2200 Fax: 949-225-2222  
www.aquatec.com

# AQUAJET 5800 SERIES PUMP


Model: 5853-GE12-V81D

## PERFORMANCE DATA

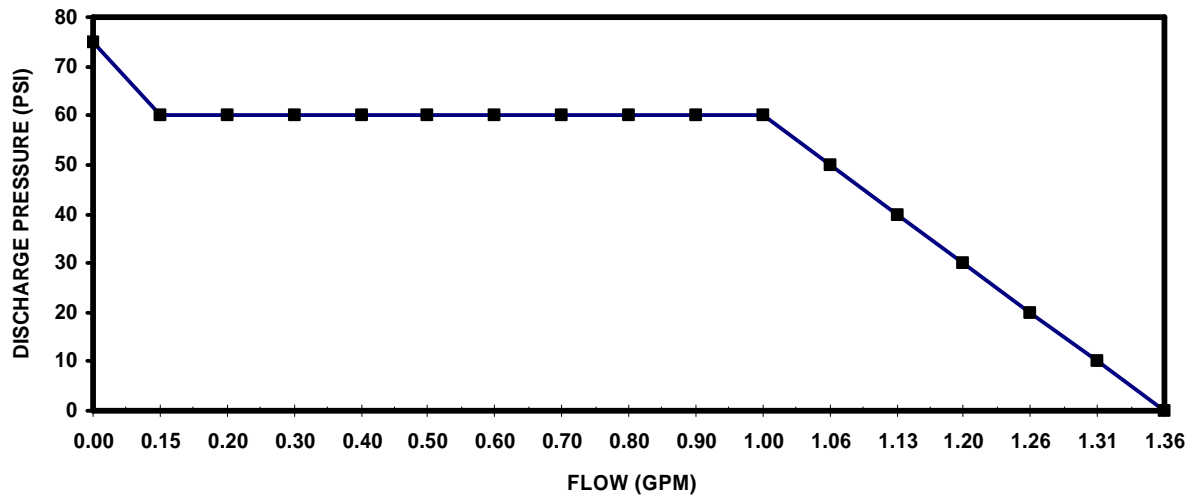

PERFORMANCE MEASURED WITH FLOODED INLET (0 PSI), 70°F (21°C) AMBIENT AND WATER TEMPERATURE, AND VOLTAGE CONTROLLED AT 115 VAC. FLOWS WERE RECORDED AFTER TEMPERATURES HAD STABILIZED. POSITIVE INLET PRESSURE WILL INCREASE THE MAXIMUM FLOW AT THE REGULATED DISCHARGE PRESSURE. MAXIMUM INLET PRESSURE IS 60 PSI.

## HEAT RISE

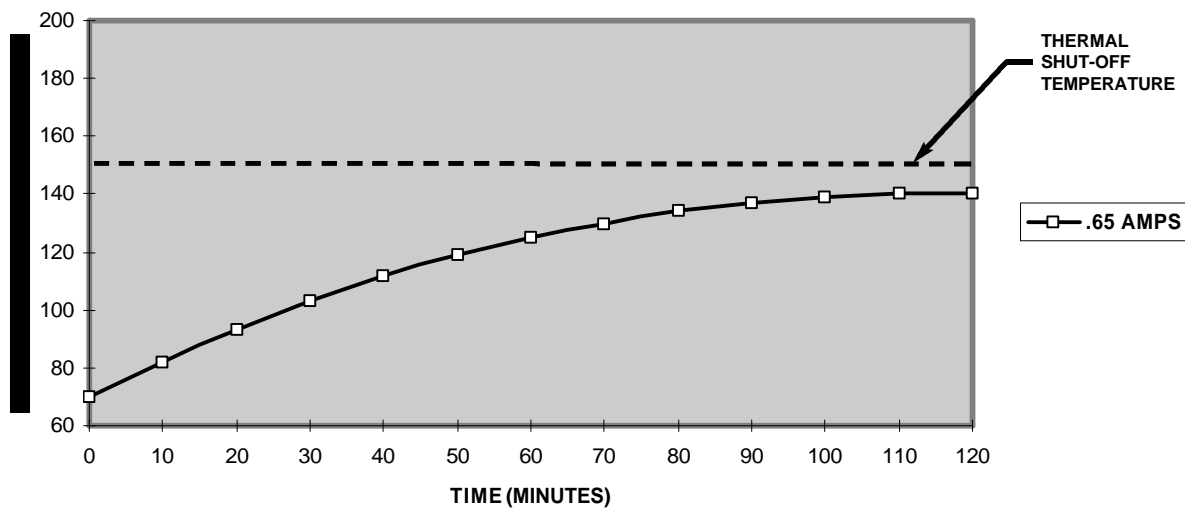

This pump model stays in the shaded area of the Performance Data and Heat Rise charts, meaning it is capable of sustaining continual running, at any of the above listed pressures, without shutting down to allow the motor to cool. To conserve wearing parts, however, the pump should only operate as needed.

ALL PERFORMANCE AND HEAT RISE FIGURES ARE APPROXIMATE. ACTUAL VALUES WILL VARY WITH AMBIENT CONDITIONS.